



Art.-No.: 6.1172.0333
 6.1172.0633
 6.1172.0933
 6.1172.1233

1172

Fine Line Tape blue

Characteristics


4CR 1172 High Temperature Fine Line Tape uses a thermally stabilized PVC backing with a Rubber based pressure sensitive adhesive. This fine line tape will perform in temperatures up to 138°C for at least 45 minutes and leave a sharp, clean separation line. 4CR 1172 adheres to a wide variety of surfaces, is solvent resistant and has a high conformability. It follows contours and remains in place as long as necessary and leaves no residue upon removal. This is a splinter and fibre free tape leaving no contaminants in paintline.

Tech Tip

Masking tape for multi colour and design jobs. Medium flexibility.

Application

Preferred where tape must conform and follow contours without wrinkling or tearing.
 4CR 1172 is used when flake resistance and removal without adhesive transfer is important.

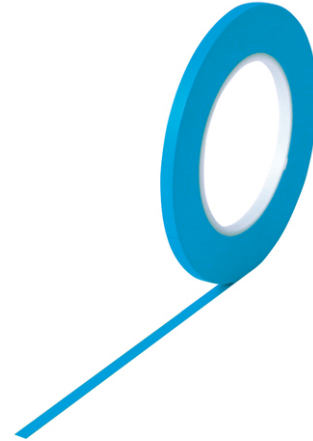

Technical Data

Carrier	PVC
Colour	DK Blue Gloss
Adhesive	Rubber
Thickness	0.163mm PSTC-33
Width	3mm, 6mm, 9mm and 12mm (+/- 1mm)
Length	33m (+/- 0.1m)
Tensile Strength	0.215 kg/mm ASTM D-3759
Elongation strength	600 %
Adhesion to steel	33.6 g/mm ASTM D-3330
Heat resistance	138°C for at least 45 minutes

Storage and Transportation

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.